

SCT44160

ORDERABLE DEVICE	PACKAGING TYPE	STANDARD PACK QTY	PACKAGE MARKING	PINS	PACKAGE DESCRIPTION	MSL

DESCRIPTION	MIN	MAX	UNIT

SCT44160

PARAMETER	THERMAL METRIC	ETSSOP-28L	UNIT


Logic Input(INx,DIAG_EN,THER,SEH,SEL)


|



|


|

|

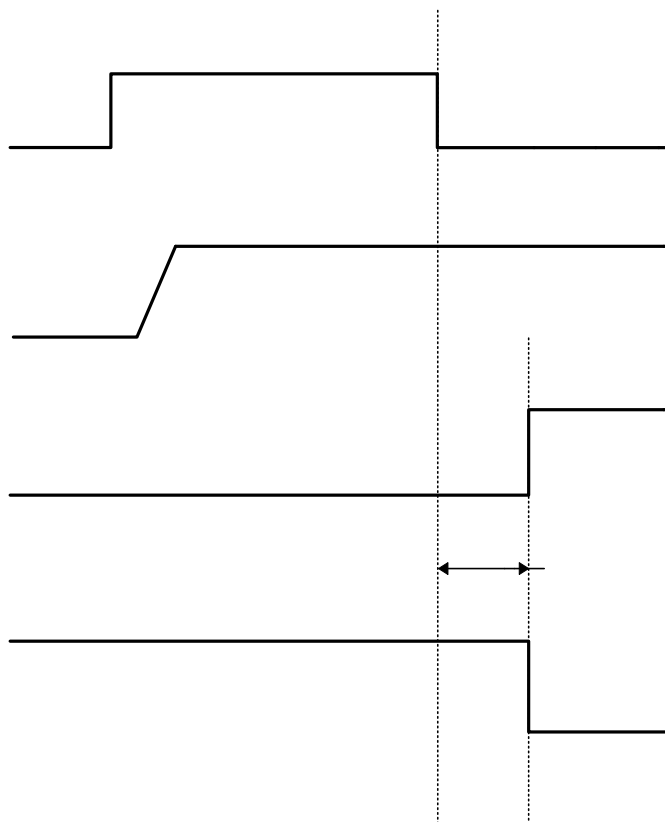



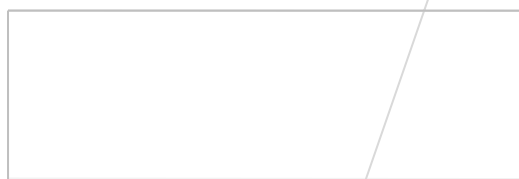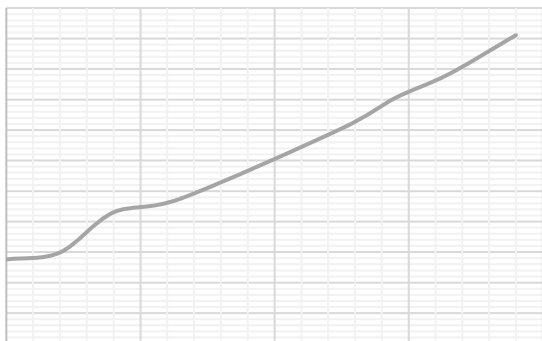

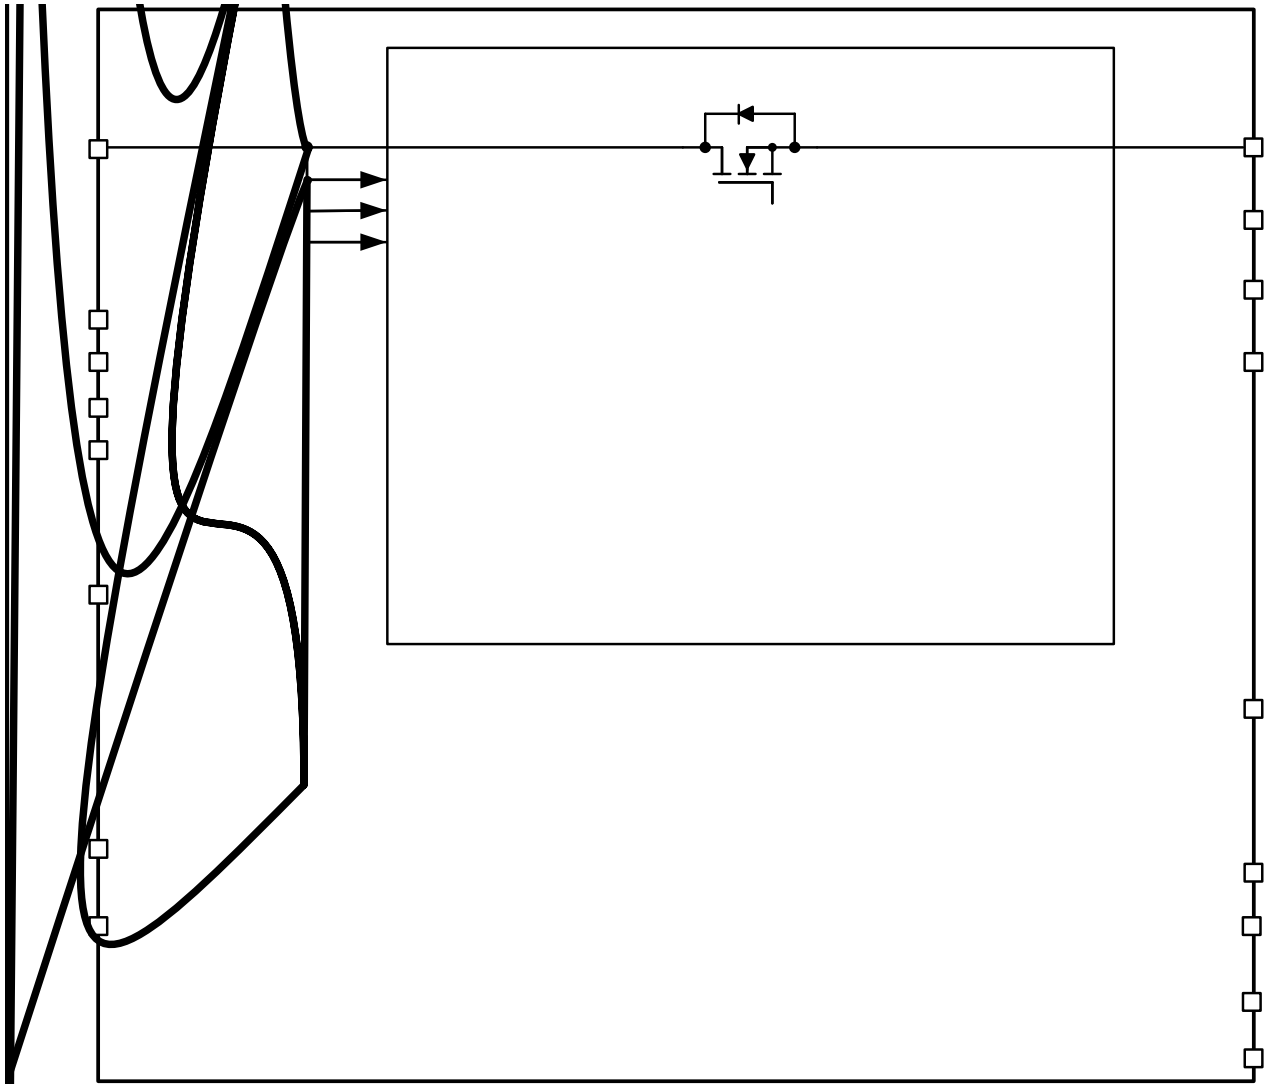

Overview

Adjustable Current Limit


SCT44160

Accurate Current Sense

Thermal Shutdown

MCU I/O Protection


Typical Application

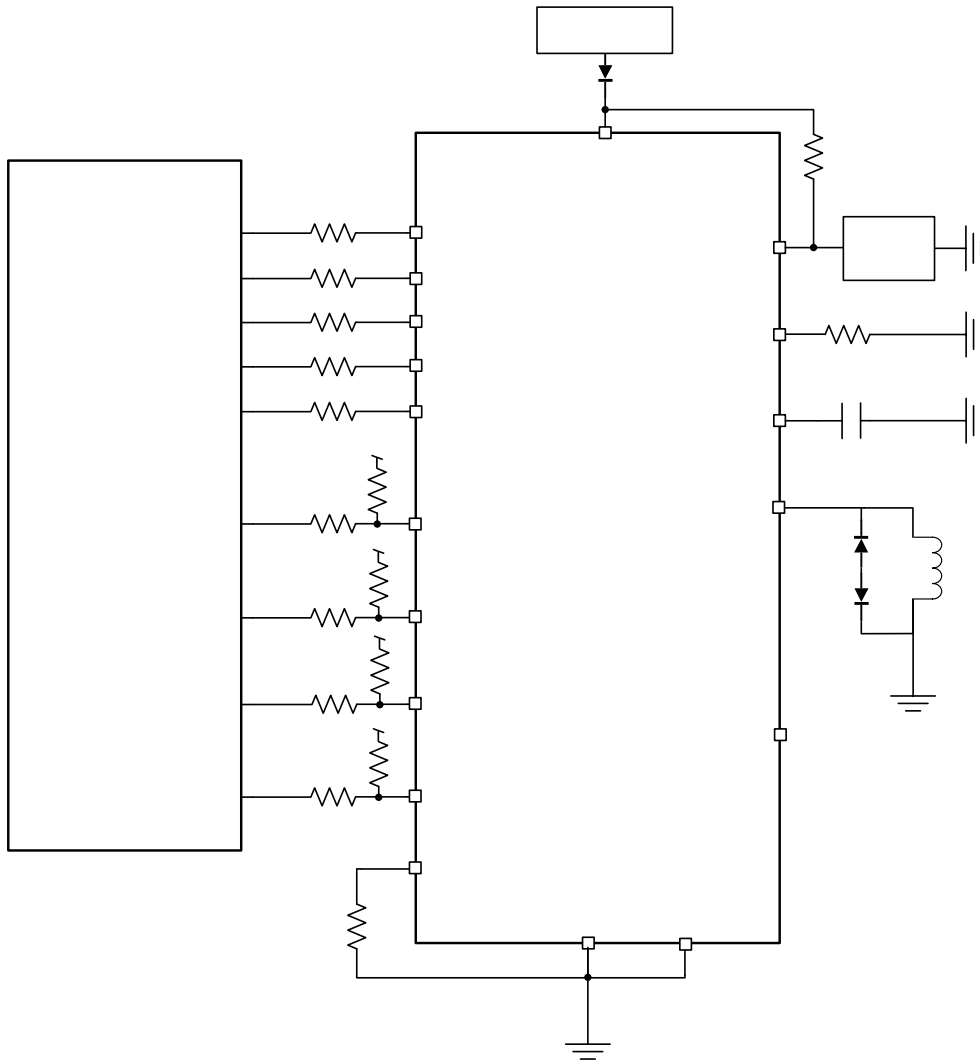

Design Parameters

Design Parameters


Typical Application (continued)

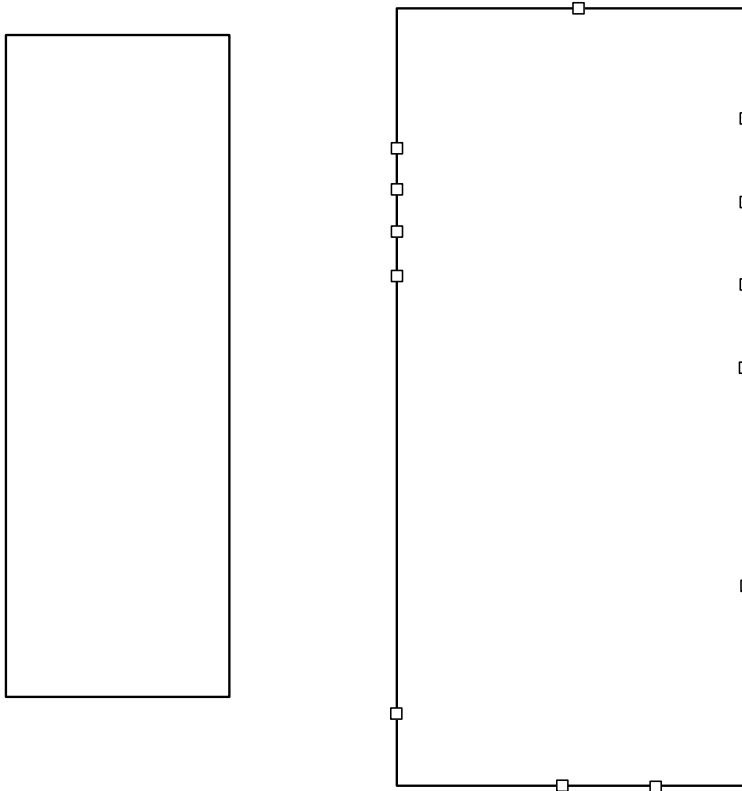

Design Parameters

Design Parameters	Example Value






Typical Application (continued)

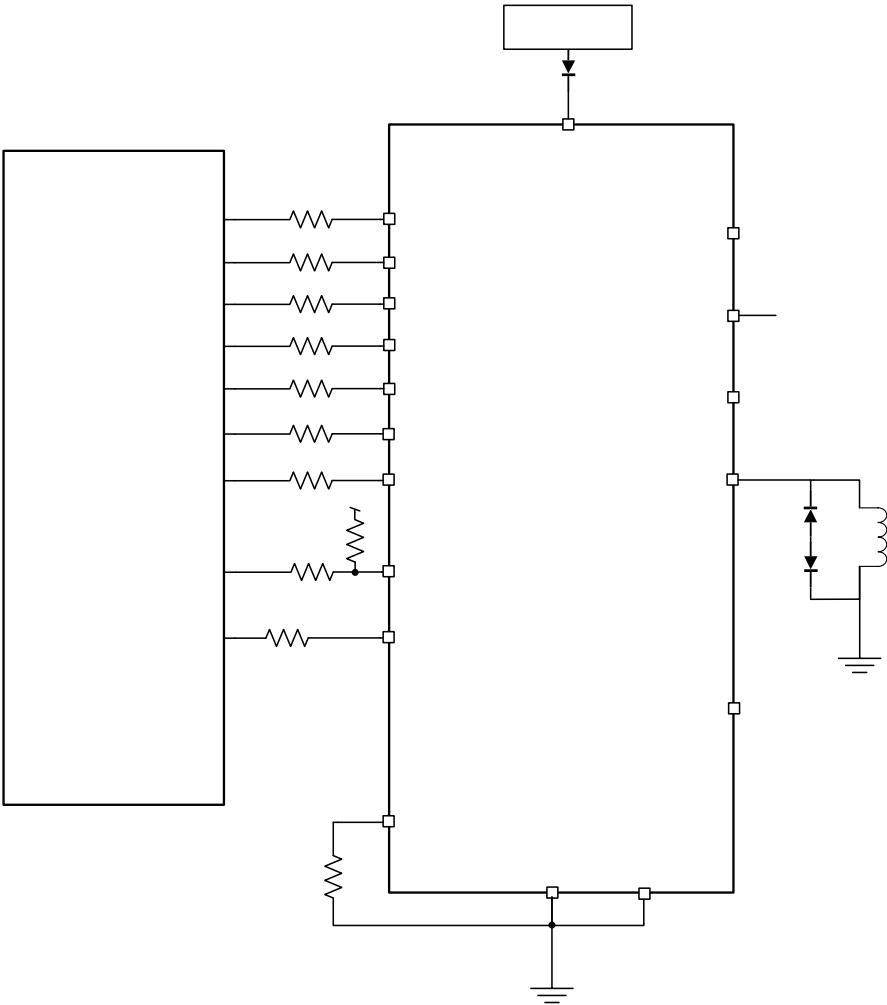


Design Parameters






Design Parameters	Example Value
-------------------	---------------

Application Waveforms

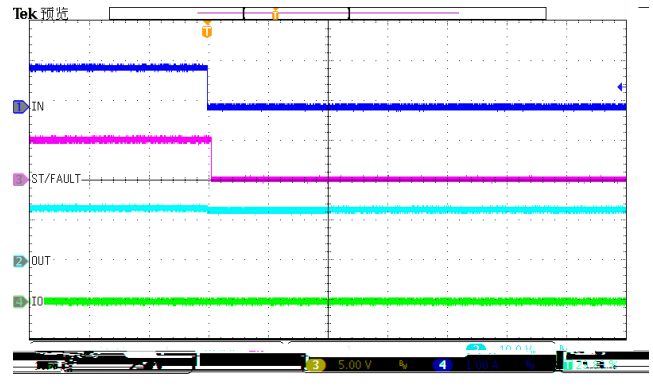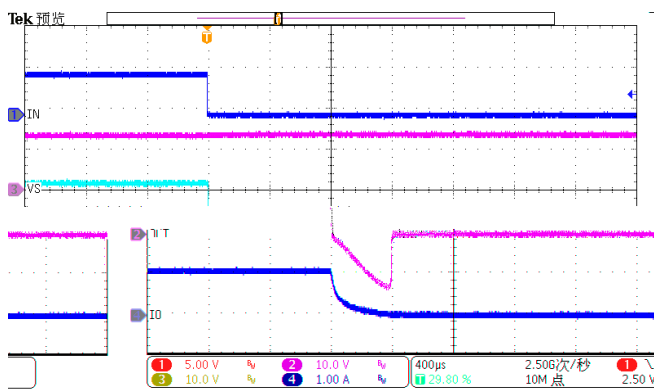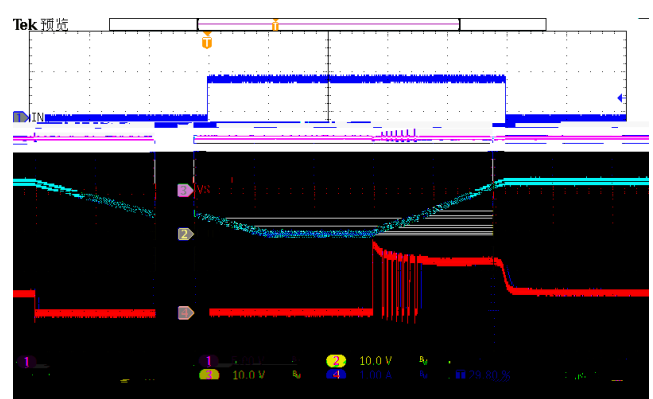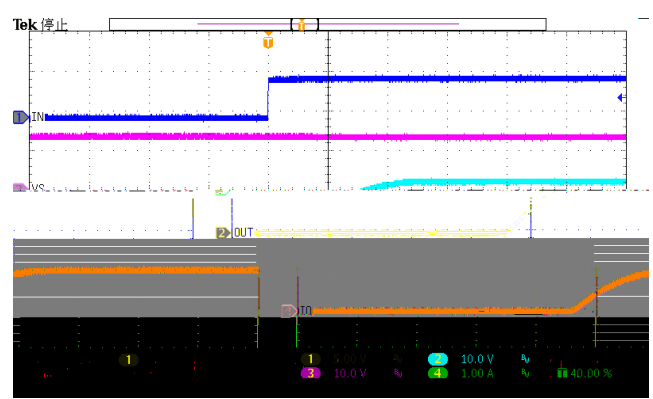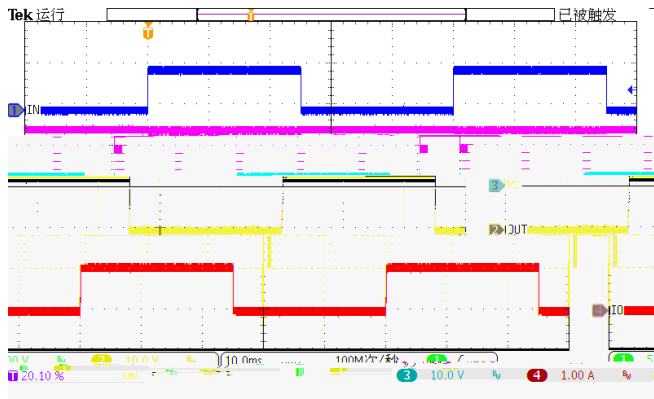


Layout Guideline

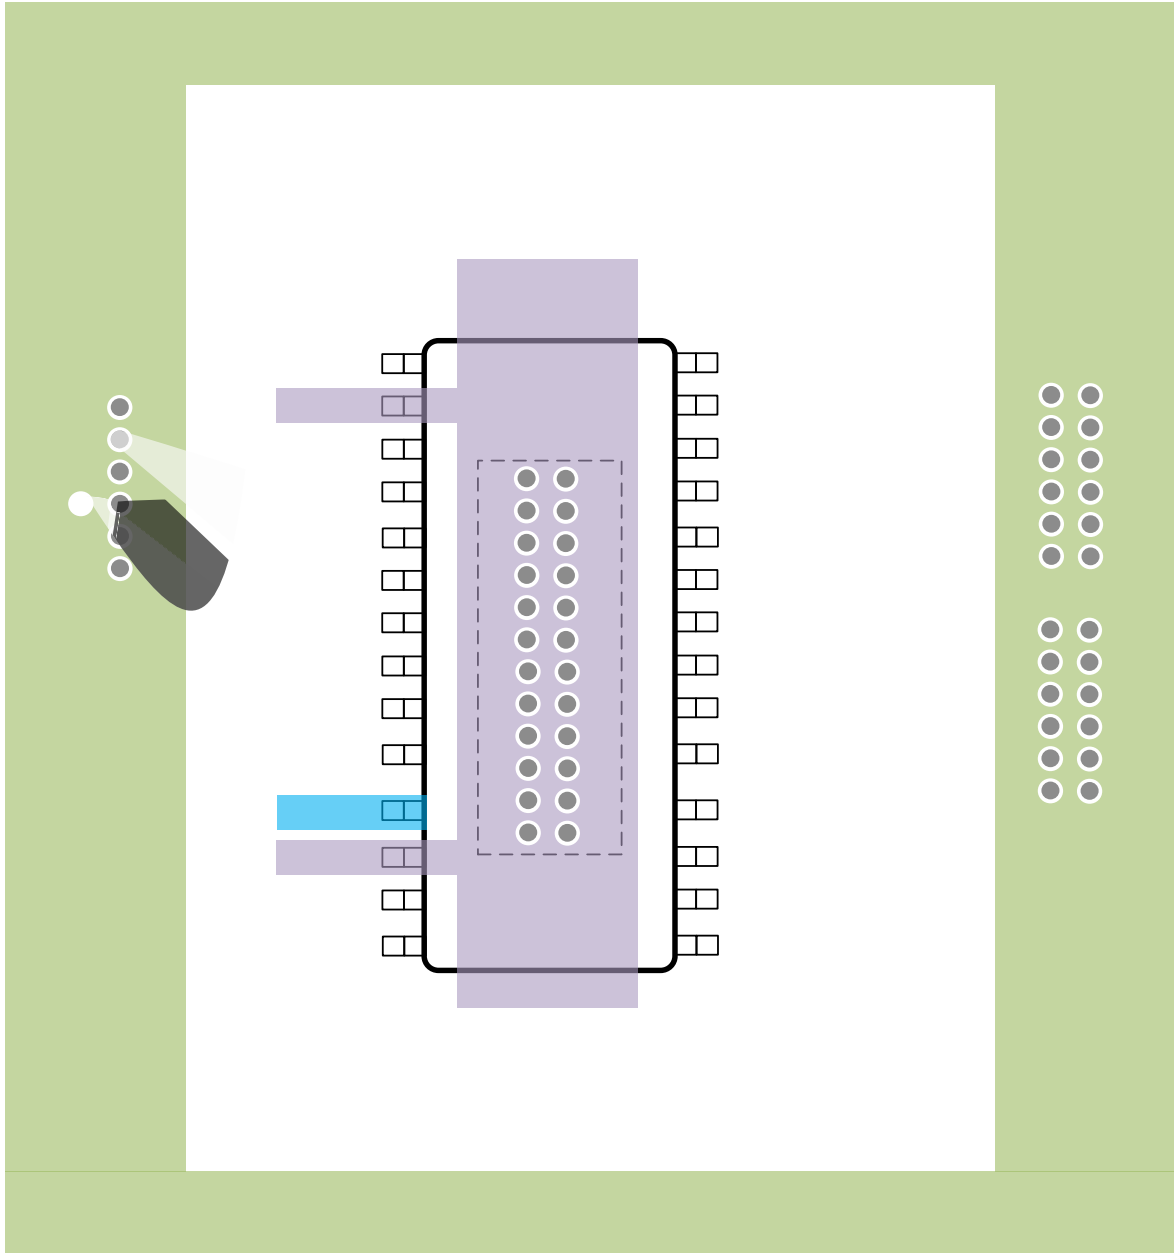

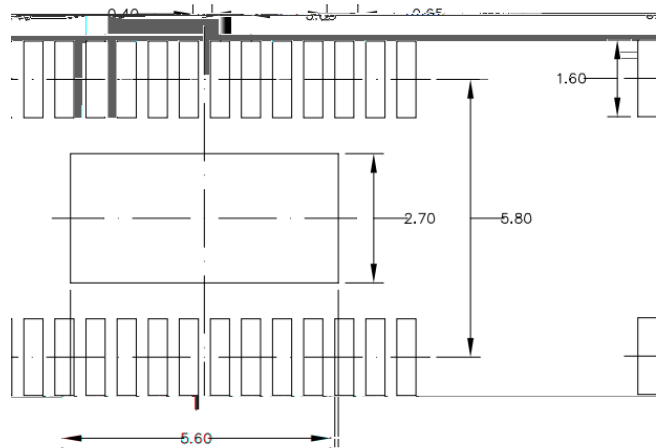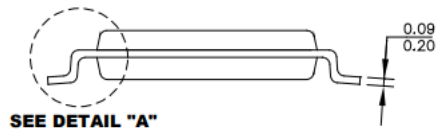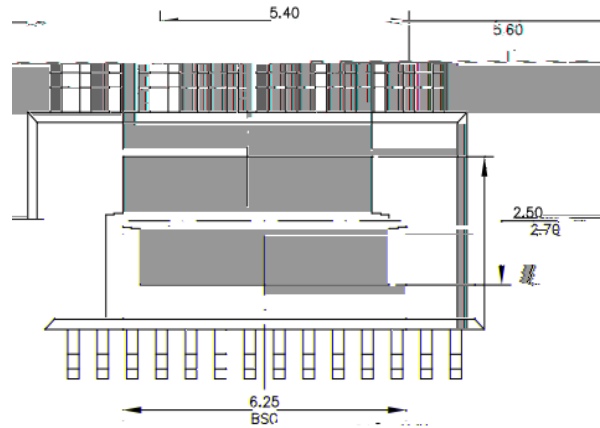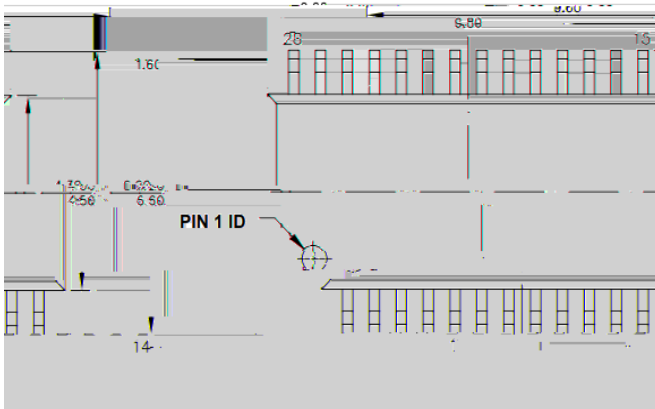

NOTE:

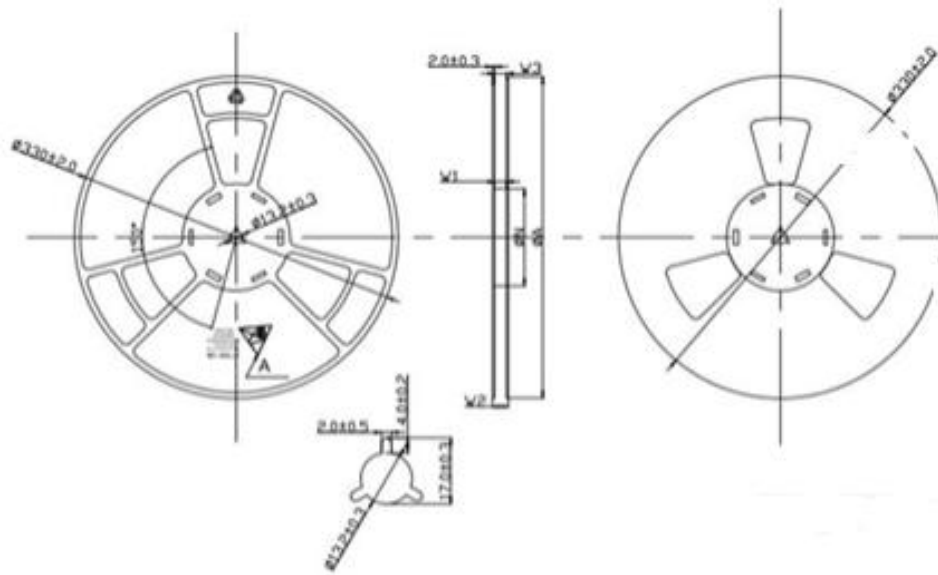

PRODUCT SPECIFICATIONS					
TYPE WIDTH	ØA	ØN	W1(+0.8)	W2(Max)	W3(Max)
16MM	330±2.0	100±1.0	16.4	22.4	15.9/19.4

